

PC


Male Straight



■ SPECIFICATIONS

Fluid type : Air(No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm²(0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg(-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

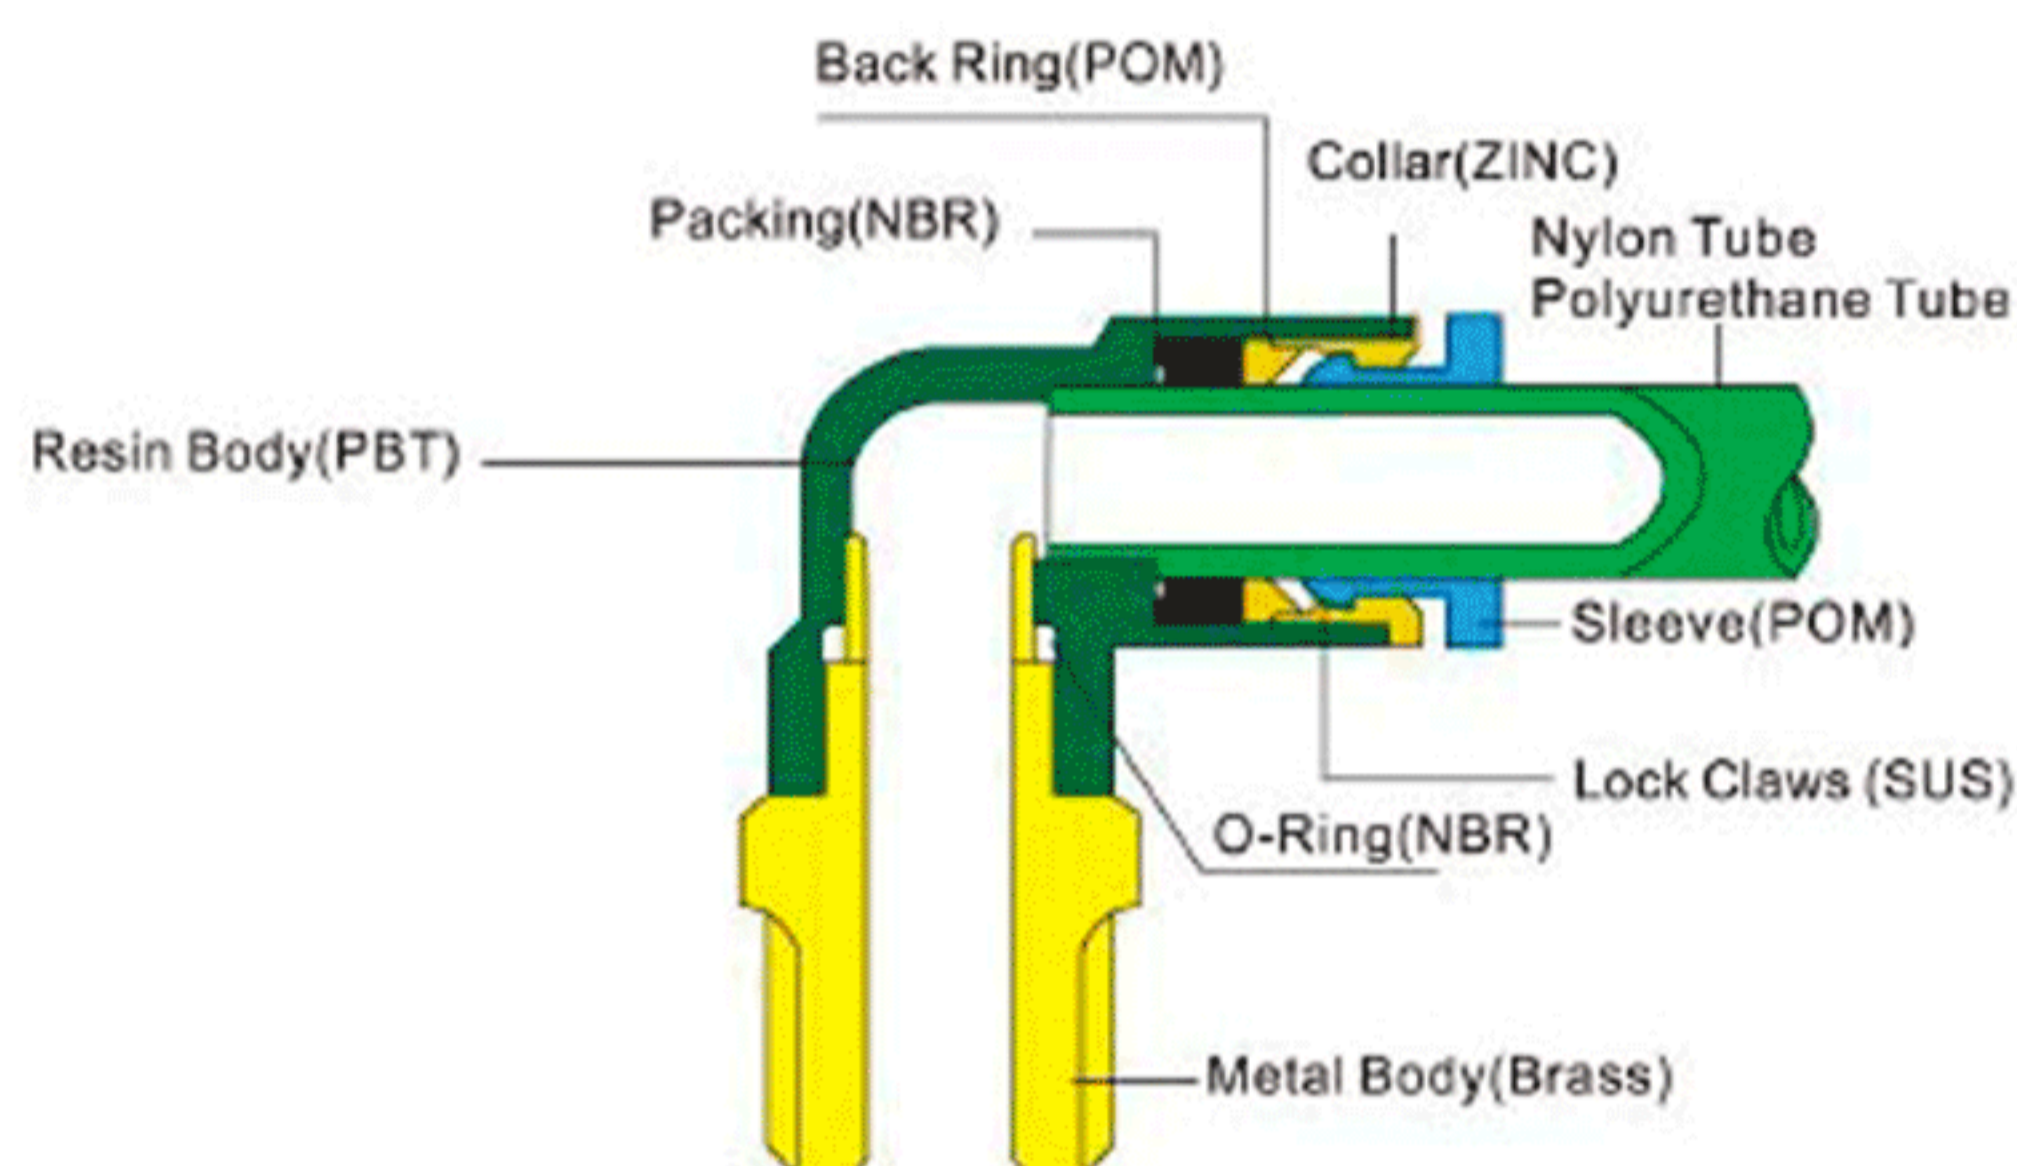

MODEL (Φ D-T) 型号 (Φ D-T)						
Tube (Metric)-Thread (R) 管(公制)-螺纹(R)			Tube(Inch)-Thread (NPT) 管(英寸)-螺纹(NPT)		Tube(Metric)-Thread (G) 管(公制)-螺纹(G)	
PC 04-M5	PC 06-04	PC 12-02	PC5/32-UNF	PC 5/16-N04	PC 04-G01	PC 10-G01
PC 04-M6	PC 08-01	PC 12-03	PC 5/32-N01	PC 3/8-N01	PC 04-G02	PC 10-G02
PC 04-01	PC 08-02	PC 12-04	PC 5/32-N02	PC 3/8-N02	PC 04-G03	PC 10-G03
PC 04-02	PC 08-03	PC 16-03	PC 1/4-N01	PC 3/8-N03	PC 06-G01	PC 10-G04
PC 04-03	PC 08-04	PC 16-04	PC 1/4-N02	PC 3/8-N04	PC 06-G02	PC 12-G02
PC 06-M5	PC 10-01		PC 1/4-N03	PC 1/2-N02	PC 06-G03	PC 12-G03
PC 06-M6	PC 10-02		PC 1/4-N04	PC 1/2-N03	PC 08-G01	PC 12-G04
PC 06-01	PC 10-03		PC 5/16-N01	PC 1/2-N04	PC 08-G02	PC 16-G03
PC 06-02	PC 10-04		PC 5/16-N02		PC 08-G03	PC 16-G04
PC 06-03	PC 12-01		PC 5/16-N03		PC 08-G04	