

PWT


Male Y



■ SPECIFICATIONS

Fluid type : Air(No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm²(0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg(-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

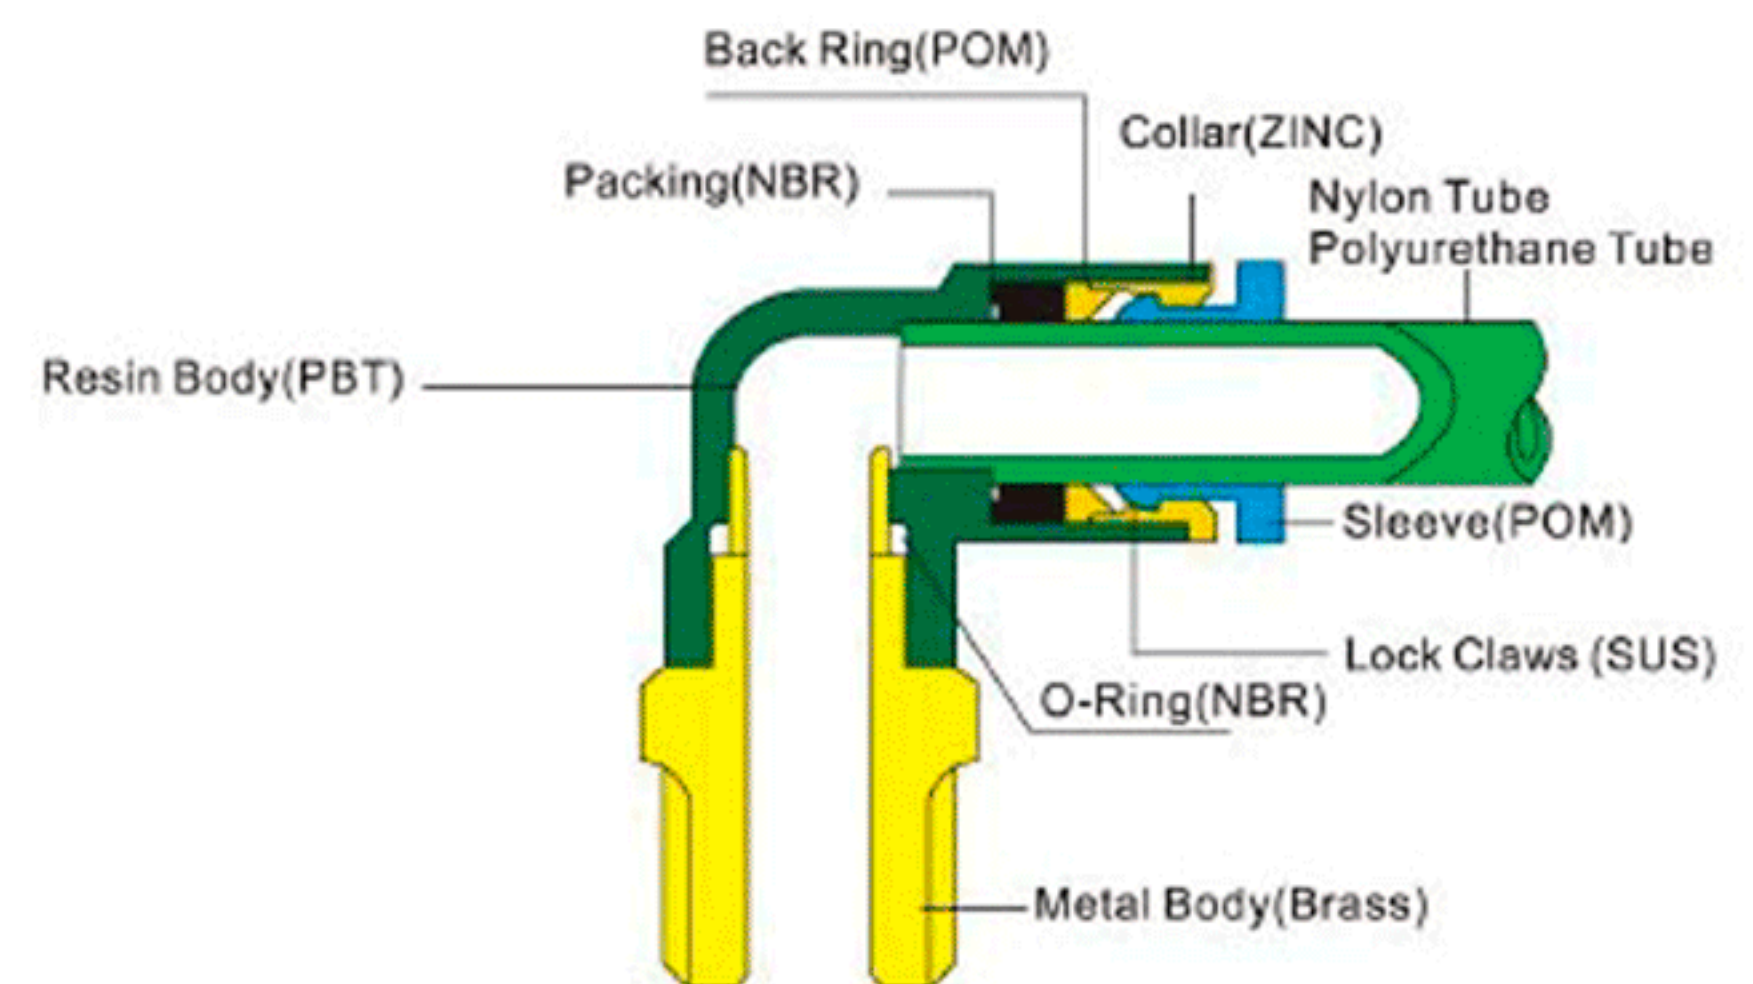

MODEL (φ D-T) 型号 (φ D-T)						
Tube (Metric)-Thread (R) 管(公制)-螺纹(R)			Tube(Inch)-Thread (NPT) 管(英寸)-螺纹(NPT)		Tube(Metric)-Thread (G) 管(公制)-螺纹(G)	
PWT 04-M5	PWT 08-02	PWT 12-04	PWT 5/32-UNF	PWT 5/16-N04	PWT 04-G01	PWT 10-G01
PWT 04-01	PWT 08-03		PWT 5/32-N01	PWT 3/8-N01	PWT 04-G02	PWT 10-G02
PWT 04-02	PWT 08-04		PWT 5/32-N02	PWT 3/8-N02	PWT 04-G03	PWT 10-G03
PWT 04-03	PWT 10-01		PWT 1/4-UNF	PWT 3/8-N03	PWT 06-G01	PWT 10-G04
PWT 06-M5	PWT 10-02		PWT 1/4-N01	PWT 3/8-N04	PWT 06-G02	PWT 12-G02
PWT 06-01	PWT 10-03		PWT 1/4-N02	PWT 1/2-N02	PWT 06-G03	PWT 12-G03
PWT 06-02	PWT 10-04		PWT 1/4-N03	PWT 1/2-N03	PWT 08-G01	PWT 12-G04
PWT 06-03	PWT 12-01		PWT 5/16-N01	PWT 1/2-N04	PWT 08-G02	
PWT 06-04	PWT 12-02		PWT 5/16-N02		PWT 08-G03	
PWT 08-01	PWT 12-03		PWT 5/16-N03		PWT 08-G04	