

PL


Male Elbow



■ SPECIFICATIONS

Fluid type : Air (No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm² (0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg (-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

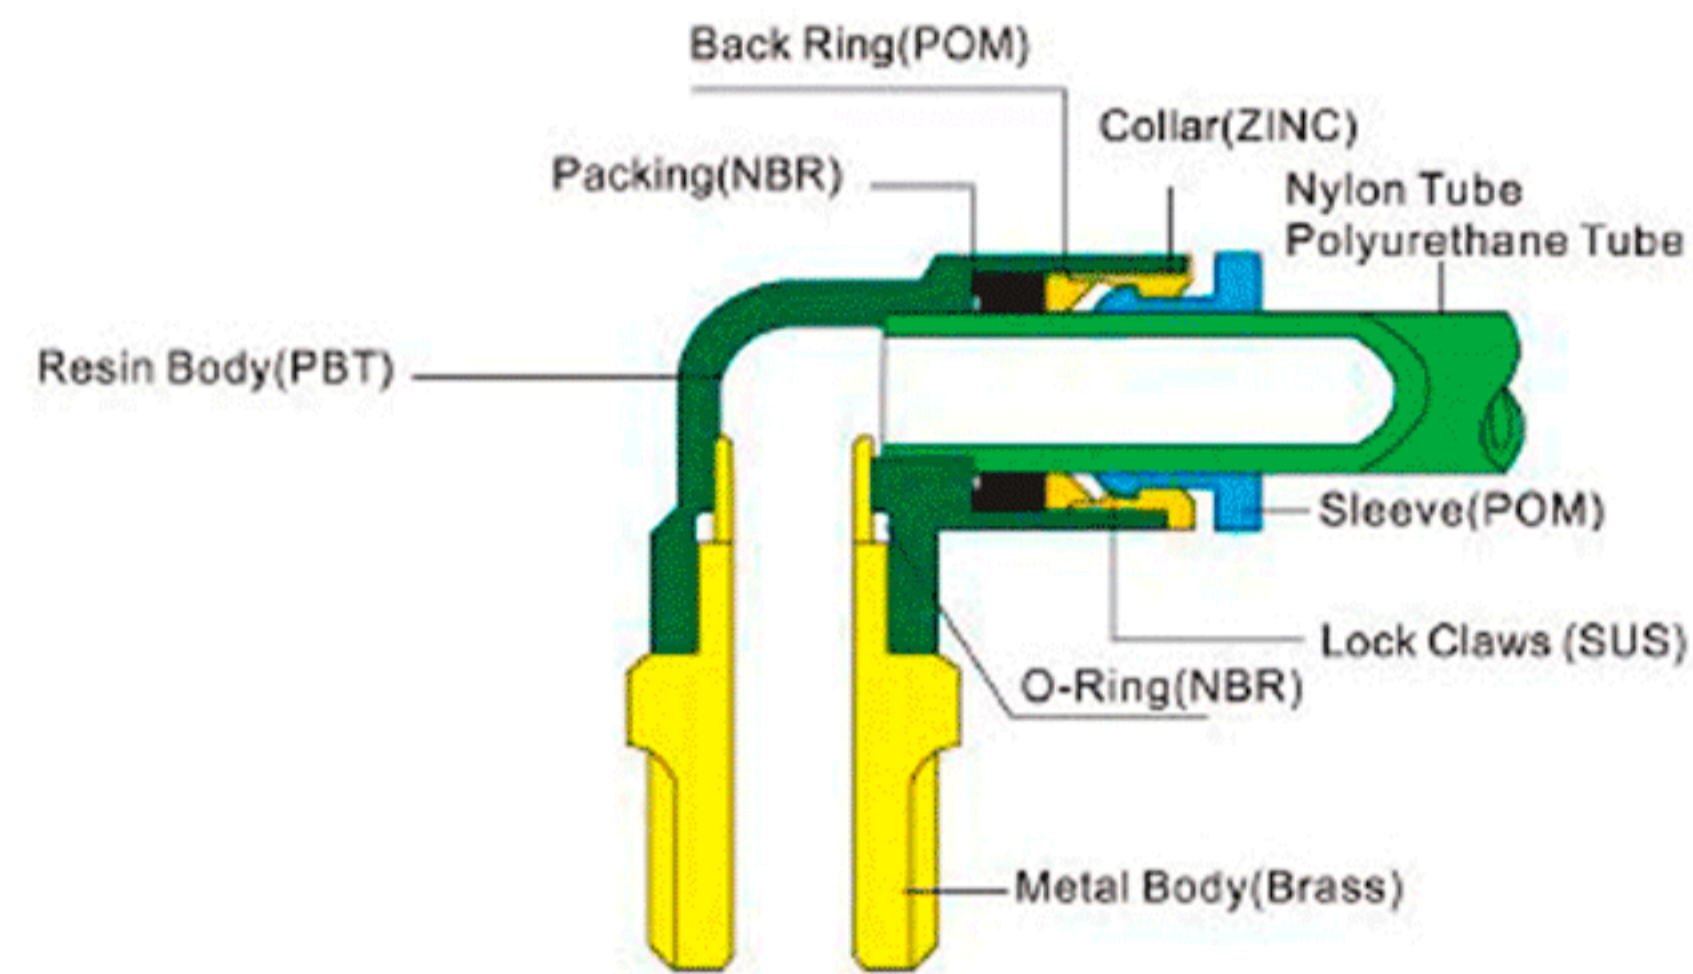

MODEL (φ D-T) 型号 (φ D-T)						
Tube (Metric)-Thread (R) 管 (公制)-螺纹 (R)		Tube (Inch)-Thread (NPT) 管 (英寸)-螺纹 (NPT)		Tube (Metric)-Thread (G) 管 (公制)-螺纹 (G)		
PL 04-M5	PL 06-04	PL 12-02	PL 5/32-UNF	PL 5/16-N04	PL 04-G01	PL10-G01
PL 04-M6	PL 08-01	PL 12-03	PL 5/32-N01	PL 3/8-N01	PL 04-G02	PL10-G02
PL 04-01	PL 08-02	PL 12-04	PL 5/32-N02	PL 3/8-N02	PL04-G03	PL10-G03
PL 04-02	PL 08-03	PL16-03	PL 1/4-UNF	PL 3/8-N03	PL 06-G01	PL 10-G04
PL 04-03	PL 08-04	PL16-04	PL 1/4-N01	PL 3/8-N04	PL 06-G02	PL 12-G02
PL 06-M5	PL 10-01		PL 1/4-N02	PL 1/2-N02	PL 06-G03	PL 12-G03
PL 06-M6	PL 10-02		PL1/4-N03	PL 1/2-N03	PL 08-G01	PL 12-G04
PL 06-01	PL 10-03		PL 5/16-N01	PL 1/2-N04	PL 08-G02	PL 16-G03
PL 06-02	PL 10-04		PL 5/16-N02		PL 08-G03	PL 16-G04
PL 06-03	PL 12-01		PL 5/16-N03		PL 08-G04	