

PKD-G


Male Reducer Triple Branch



■ SPECIFICATIONS

Fluid type : Air(No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm²(0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg(-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

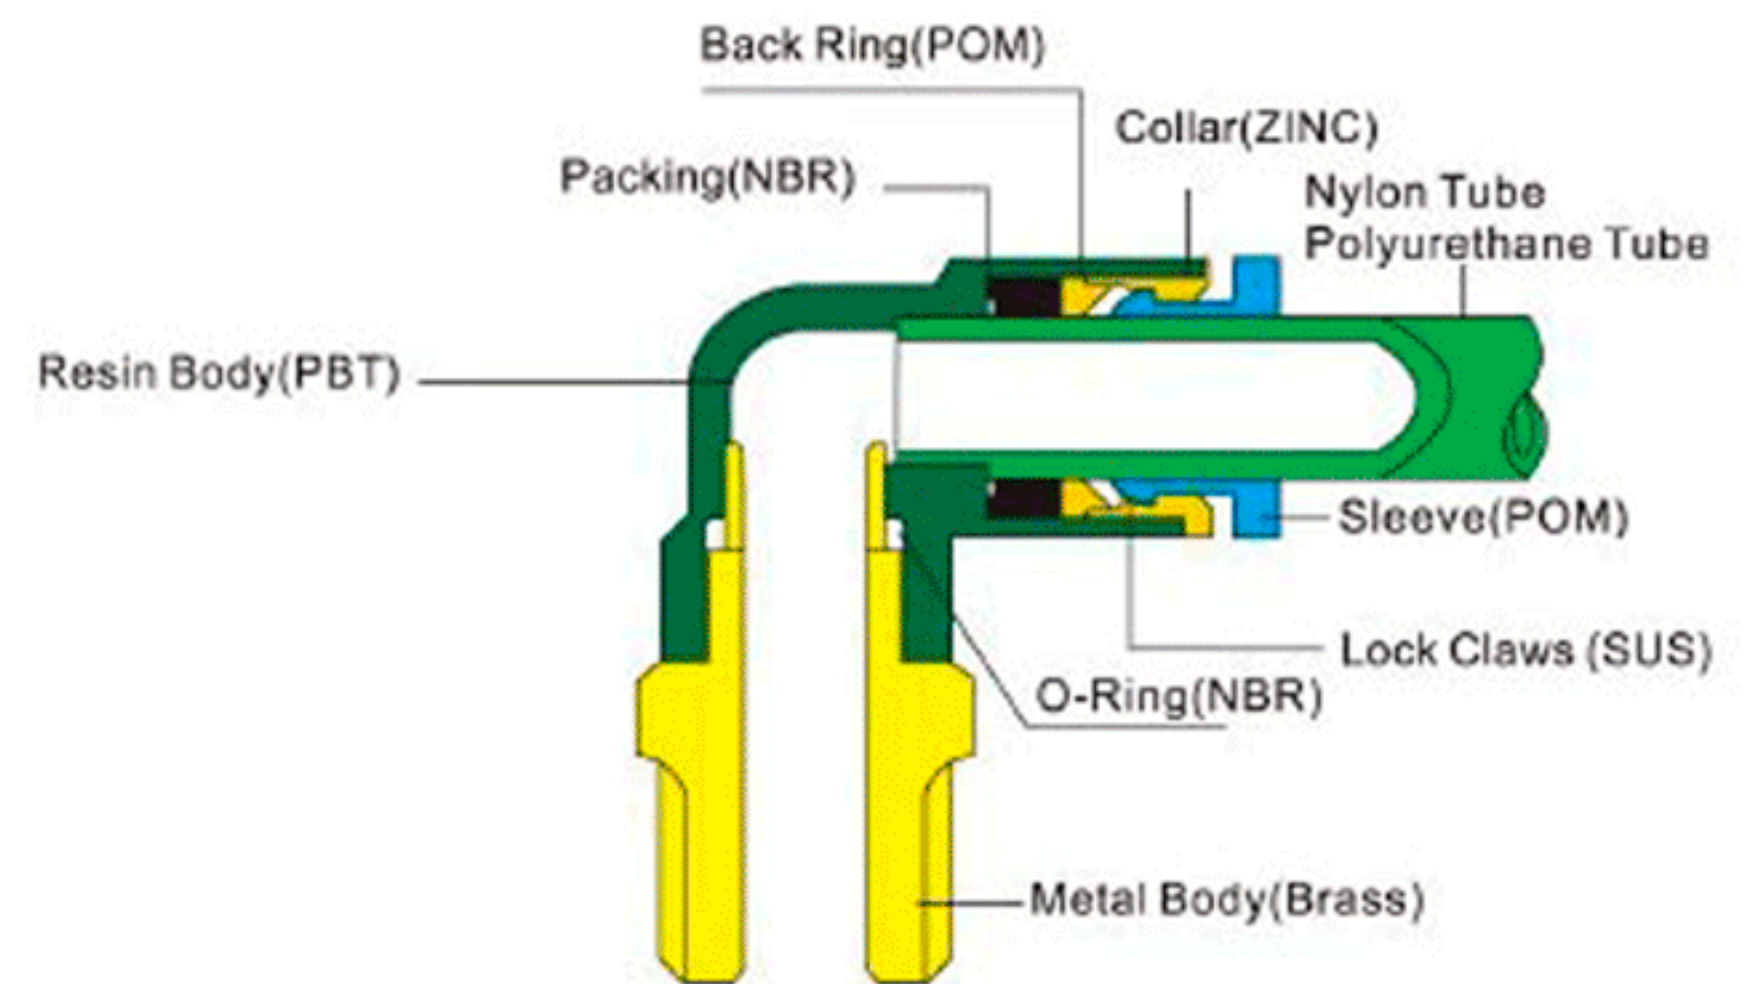

| MODEL (φ D-T) 型号(φ D-T) | | |
|---|--|--|
| Tube (Metric)-Thread (R) 管(公制)-螺纹(R) | Tube(Inch)-Thread (NPT) 管(英寸)-螺纹(NPT) | Tube(Metric)-Thread (G) 管(公制)-螺纹(G) |
| PKD 0604-01 | PKD 1/4-5/32-N01 | PKD 0604-G01 |
| PKD 0804-01 | PKD 5/16-5/32-N02 | PKD 0804-G01 |
| PKD 0804-02 | PKD 5/16-1/4-N02 | PKD 0804-G02 |
| PKD 0806-01 | PKD 3/8-1/4-N03 | PKD 0806-G01 |
| PKD 0806-02 | PKD 3/8-5/16-N03 | PKD 0806-G02 |
| PKD 1006-02 | | PKD 1006-G02 |
| PKD 1006-03 | | PKD 1006-G03 |
| PKD 1008-02 | | PKD 1008-G02 |
| PKD 1008-03 | | PKD 1008-G03 |