

PL45


Male Elbow



■ SPECIFICATIONS

Fluid type : Air(No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm²(0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg(-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

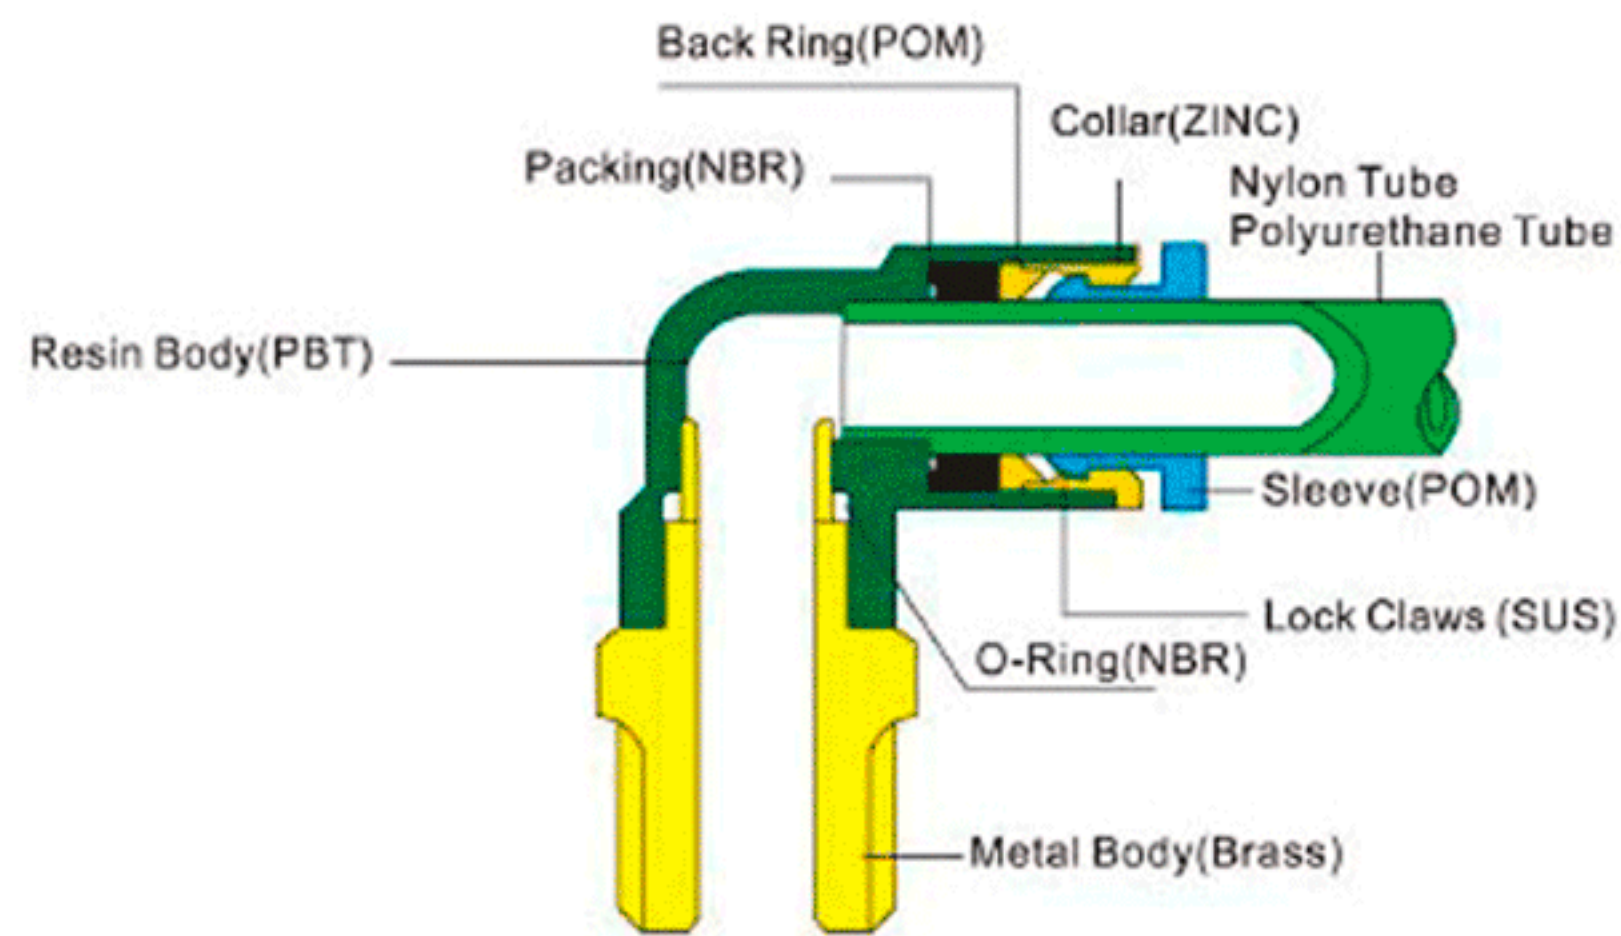

MODEL (φ D-T) 型号(φ D-T)						
Tube (Metric)-Thread (R) 管(公制)-螺纹(R)			Tube(Inch)-Thread (NPT) 管(英寸)-螺纹(NPT)		Tube(Metric)-Thread (G) 管(公制)-螺纹(G)	
PL4504-M5	PL45 06-04	PL45 12-02	PL45 5/32-U10	PL45 5/16-N03	PL45 04-G01	PL45 08-G04
PL4504-M6	PL45 08-01	PL45 12-03	PL45 5/32-U01	PL45 5/16-N04	PL45 04-G02	PL45 10-G01
PL45 04-01	PL45 08-02	PL45 12-04	PL45 5/32-U02	PL45 3/8-N01	PL45 04-G03	PL45 10-G02
PL45 04-02	PL45 08-03		PL45 5/32-U03	PL45 3/8-N02	PL45 06-G01	PL45 10-G03
PL45 04-03	PL45 08-04		PL45 1/4-U10	PL45 3/8-N03	PL45 06-G02	PL45 10-G04
PL45 06-M5	PL45 10-01		PL45 1/4-N01	PL45 3/8-N04	PL45 06-G03	PL45 12-G01
PL45 06-M6	PL45 10-02		PL45 1/4-N02	PL45 1/2-N01	PL45 06-G04	PL45 12-G02
PL45 06-01	PL45 10-03		PL45 1/4-N03	PL45 1/2-N02	PL45 08-G01	PL45 12-G03
PL45 06-02	PL45 10-04		PL45 1/4-N04	PL45 1/2-N03	PL45 08-G02	PL45 12-G04
PL45 06-03	PL45 12-01		PL45 5/16-N02	PL45 1/2-N04	PL45 08-G03	