

PCF


Female Straight



■ SPECIFICATIONS

Fluid type : Air (No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm² (0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg (-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

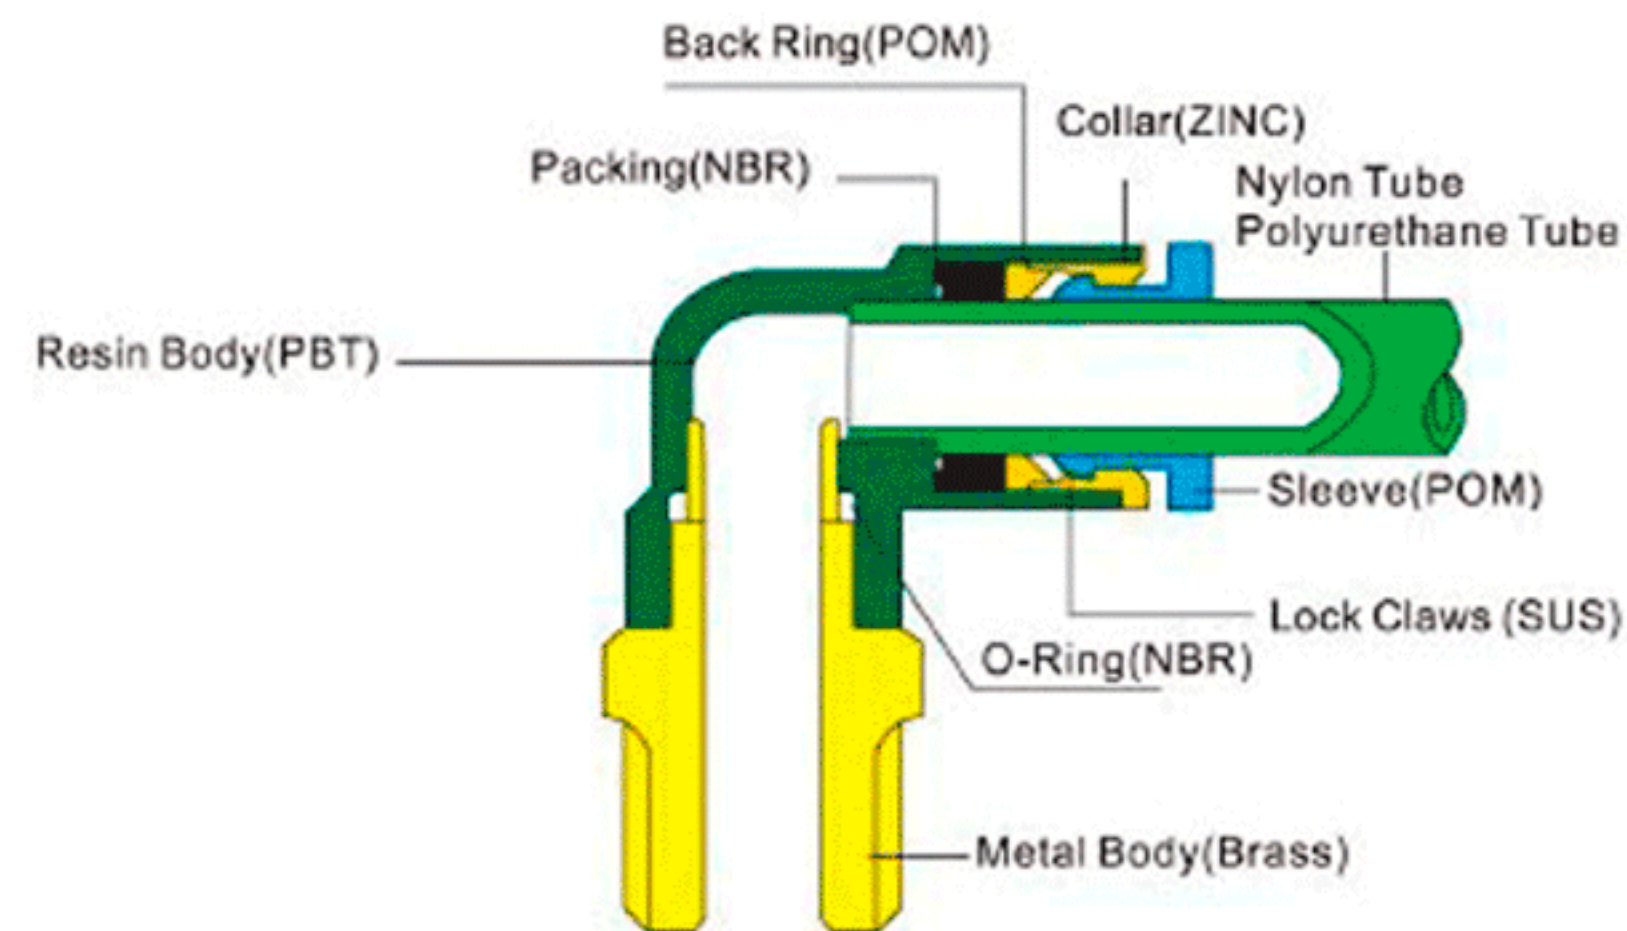

MODEL (φ D-T) 型号 (φ D-T)						
Tube (Metric)-Thread (R) 管 (公制)-螺纹 (R)			Tube (Inch)-Thread (NPT) 管 (英寸)-螺纹 (NPT)		Tube (Metric)-Thread (G) 管 (公制)-螺纹 (G)	
PCF 04-M5	PCF 08-01	PCF 12-03	PCF 5/32-N01	PCF 3/8-N01	PCF 04-G01	PCF 08-G04
PCF 04-01	PCF 08-02	PCF 12-04	PCF 5/32-N02	PCF 3/8-N02	PCF 04-G02	PCF 10-G01
PCF 04-02	PCF 08-03	PCF 16-03	PCF 1/4-N01	PCF 3/8-N03	PCF 04-G03	PCF 10-G02
PCF 04-03	PCF 08-04	PCF 16-04	PCF 1/4-N02	PCF 3/8-N04	PCF 06-G01	PCF 10-G03
PCF 06-M5	PCF 10-01		PCF 1/4-N03	PCF 1/2-N02	PCF 06-G02	PCF 10-G04
PCF 06-01	PCF 10-02		PCF 5/16-N01	PCF 1/2-N03	PCF 06-G03	PCF 12-G02
PCF 06-02	PCF 10-03		PCF 5/16-N02		PCF 08-G01	PCF 12-G03
PCF 06-03	PCF 10-04		PCF 5/16-N03		PCF 08-G02	PCF 12-G04
PCF 06-04	PCF 12-02		PCF 5/16-N04		PCF 08-G03	