

PLF

Female Elbow




T

φ D

■ SPECIFICATIONS

Fluid type : Air (No other gases or liquids)
 Working pressure : 0~150PSI / 0~9.9Kgf/cm² (0~990kPa)
 Negative pressure : -29.5 in Hg / -750mmHg (-750Torr)
 Working temperature : 32~140°F / 0~60°C
 Applicable Tube: Polyurethane and Nylon

■ STRUCTURE CHART

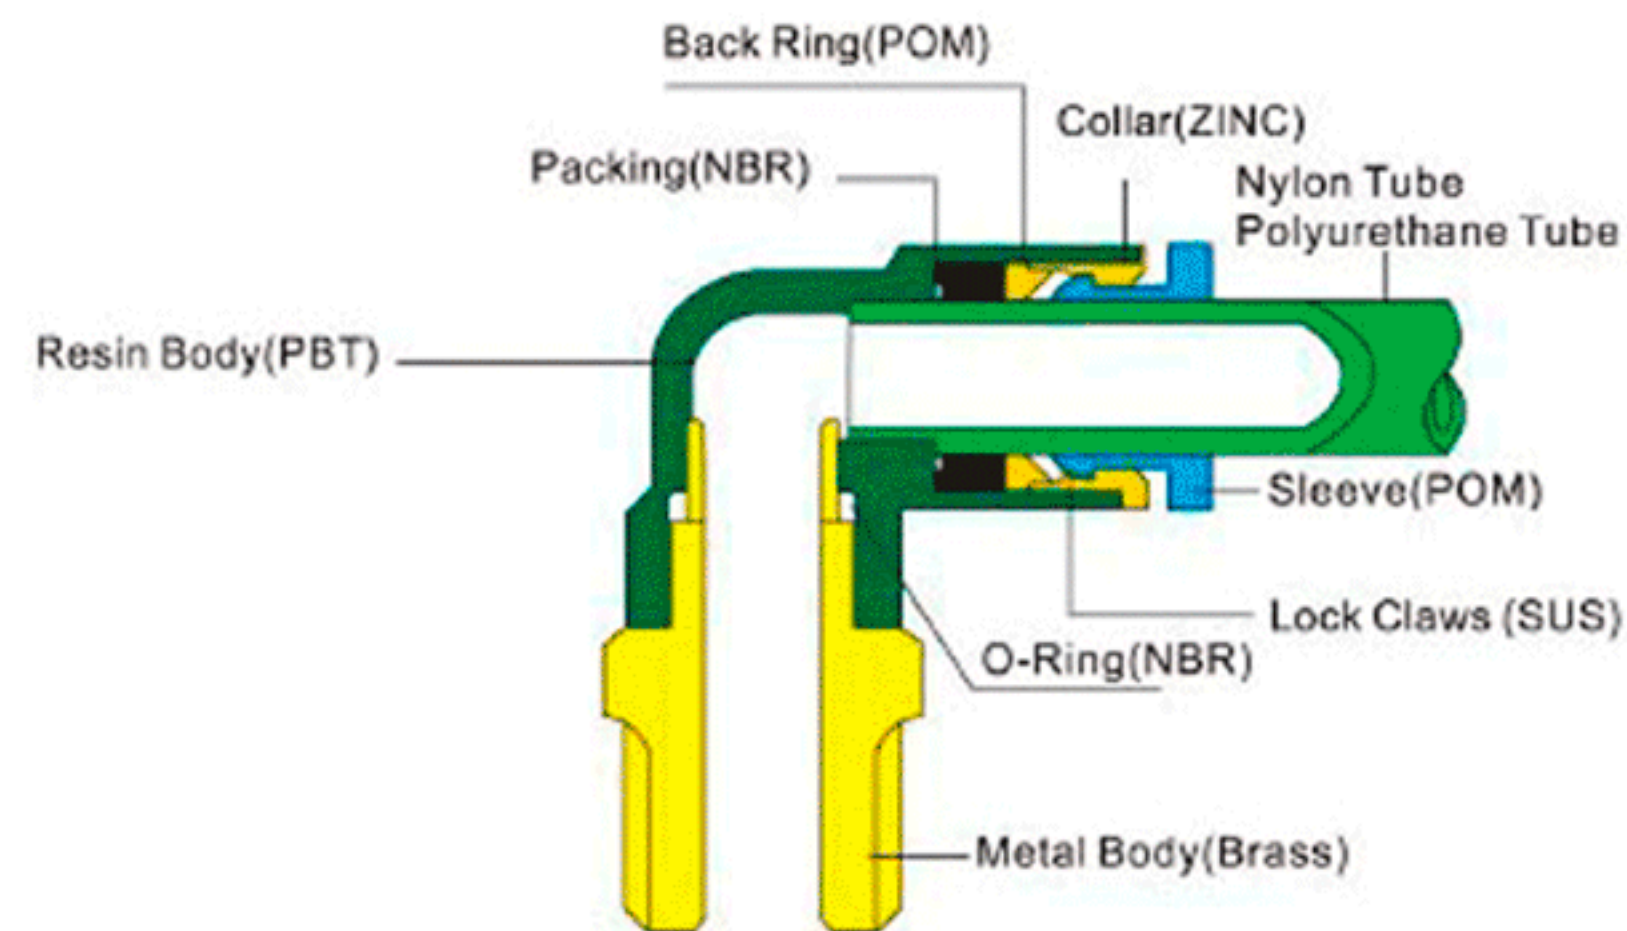

| MODEL (φ D-T) 型号 (φ D-T) | | | | | | |
|---|-----------|-----------|---|-------------|---|--------------|
| Tube (Metric)-Thread (R) 管 (公制)-螺纹 (R) | | | Tube (Inch)-Thread (NPT) 管 (英寸)-螺纹 (NPT) | | Tube (Metric)-Thread (G) 管 (公制)-螺纹 (G) | |
| PLF 04-M5 | PLF 08-03 | PLF 16-04 | PLF 5/32-UNF | PLF 3/8-N02 | PLF-G 04-G01 | PLF-G 10-G01 |
| PLF 04-01 | PLF 08-04 | | PLF 5/32-N01 | PLF 3/8-N03 | PLF-G 04-G02 | PLF-G 10-G02 |
| PLF 04-02 | PLF 10-01 | | PLF 5/32-N02 | PLF 3/8-N04 | PLF-G 04-G03 | PLF-G 10-G03 |
| PLF 06-M5 | PLF 10-02 | | PLF 1/4-UNF | PLF 1/2-N02 | PLF-G 06-G01 | PLF-G 10-G04 |
| PLF 06-01 | PLF 10-03 | | PLF 1/4-N01 | PLF 1/2-N03 | PLF-G 06-G02 | PLF-G 12-G02 |
| PLF 06-02 | PLF 10-04 | | PLF 1/4-N02 | PLF 1/2-N04 | PLF-G 06-G03 | PLF-G 12-G03 |
| PLF 06-03 | PLF 12-02 | | PLF 1/4-N03 | | PLF-G 08-G01 | PLF-G 12-G04 |
| PLF 06-04 | PLF 12-03 | | PLF 5/16-N01 | | PLF-G 08-G02 | |
| PLF 08-01 | PLF 12-04 | | PLF 5/16-N02 | | PLF-G 08-G03 | |
| PLF 08-02 | PLF 16-03 | | PLF 5/16-N03 | | PLF-G 08-G04 | |